Appendix A

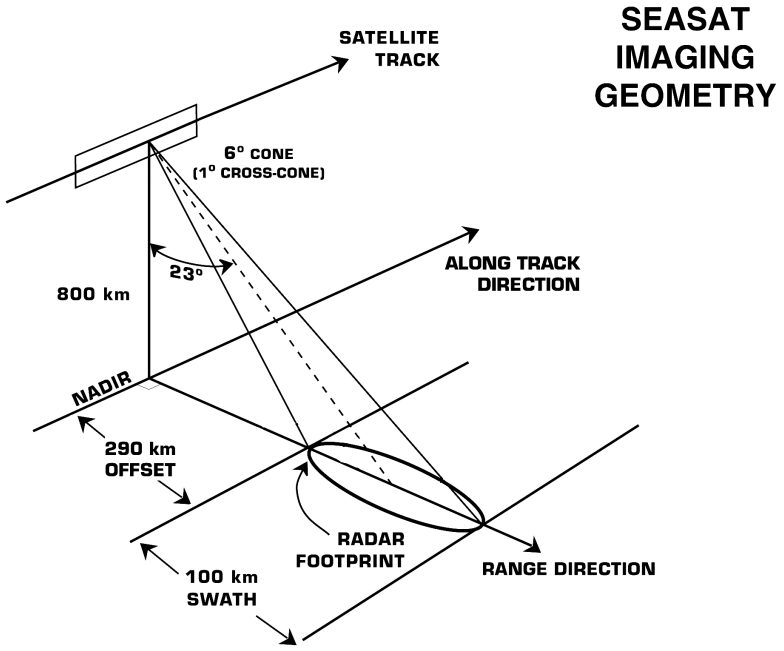

[Adapted from *Fu, L.-L., and B. Holt, 1982: Seasat views oceans and sea ice with synthetic-aperture radar. Jet Propulsion Laboratory Publ. 81-120, Pasadena, CA, 200 pp.*]

SEASAT SAR

The SEASAT SAR collected data from 4 June to 10 October 1978. Approximately 2500 minutes of SAR data were received covering in total about 100 million km^2 of the Earth's surface. Oceanographic studies using images of the oceans were the main experiment objective however, approximately 65% of the data covers land areas in North America, the Caribbean, and Western Europe. Almost all data were optically processed while approximately 15% were also digitally processed. Digitally processed images are stored at NASA JPL and are available on a limited basis in hard copy format. Contact Ben Holt: ben@pacific.jpl.nasa.gov.

SEASAT SAR Image Products

Product Name	Description
Optically Processed Image	• Coverage: 30 km x swath length (range x azimuth). • Scale: The range scale factor is nominally 1:500,000 at the center of each 30 km. swath, with a variation from near range to far range of about ± 3.5%. • Resolution: Approximately 40 m in range and azimuth.
Digitally Processed Data	• Coverage: 100 km x 100 km. • Ground Resolution: 25 m in range and azimuth. • Approximately 15% of data processed.

SEASAT SAR Coverage Map

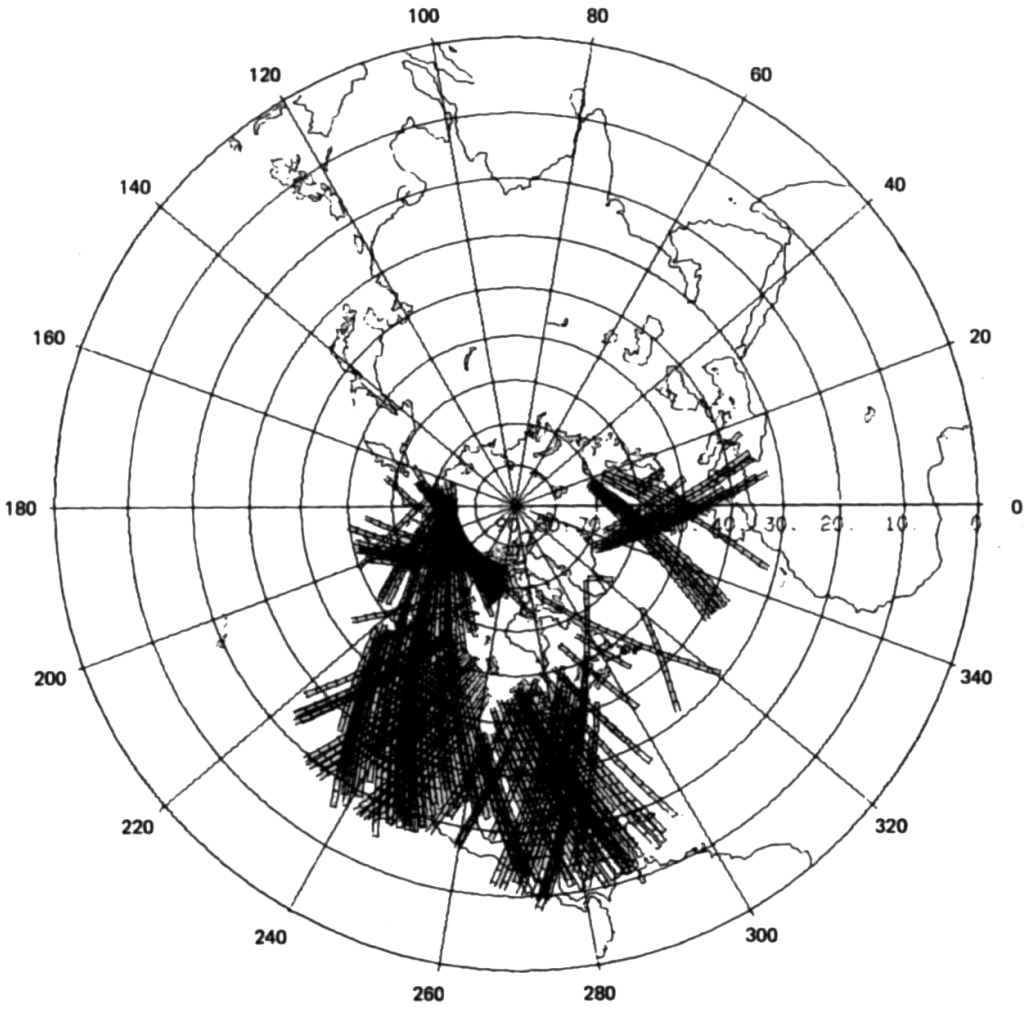

Composite SEASAT SAR areal coverage. [After *Steven H . Pravdo, S. H., B. Huneycutt, B. M. Holt and D. N. Held, 1983; Seasat Synthetic-Aperture Radar Data User's Manual. Jet Propulsion Laboratory, Publ 82-90 Pasadena, California. 104pp*]

ERS-1 and ERS-2:

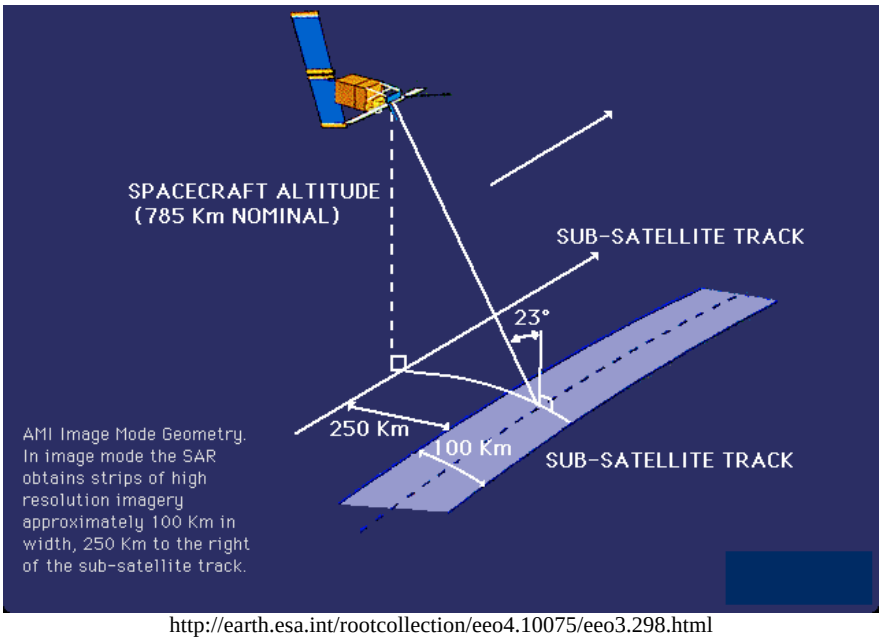

http://earth.esa.int/rootcollection/eeo4.10075/eeo3.298.html

ERS-1 and ERS-2 Standard SAR Image Products

Product Name	**Description**
RAW: Annotated Raw Data	• Description: Radar signal received by the SAR instrument. • Coverage: 100 km x 100 km (range x azimuth).
SLC: Single Look Complex	• Description: Single-look complex image (amplitude and phase data encoded as complex numbers). • Projection: Slant range. • Pixel size: 7.9 m in range (perpendicular to ground track) and 4 m in azimuth (along ground track). • SLCI full scene: 100 km x 100 km, SLCQ quarter scene: 50 km x 50 km.
PRI: Precision Image	• Description: 3-look amplitude image, radiometrically corrected and calibrated. • Projection: Ground-range on reference ellipsoid. • Coverage: 100 km x 100 km. • Ground Resolution: 25 m in range (perpendicular to ground track) at center of scene and 22 m in azimuth (along ground track). • Pixel size: 12.5 m in range and azimuth.
GEC: Geocoded Image	• Description: 3-look amplitude image, radiometrically corrected. Geocoding performed without ground control points to UTM projection for latitudes between -70° and 70°, UPS projection for higher latitudes. • Coverage: 100 km x 100 km. • Ground Resolution: 25 m in pixel row direction at center of scene and 22 m in pixel column direction. • Pixel size: 12.5 m in row and column directions.

[Adapted from *http://earth.esa.int/services/pg/index.html#ERS.SAR*]

ENVISAT ASAR

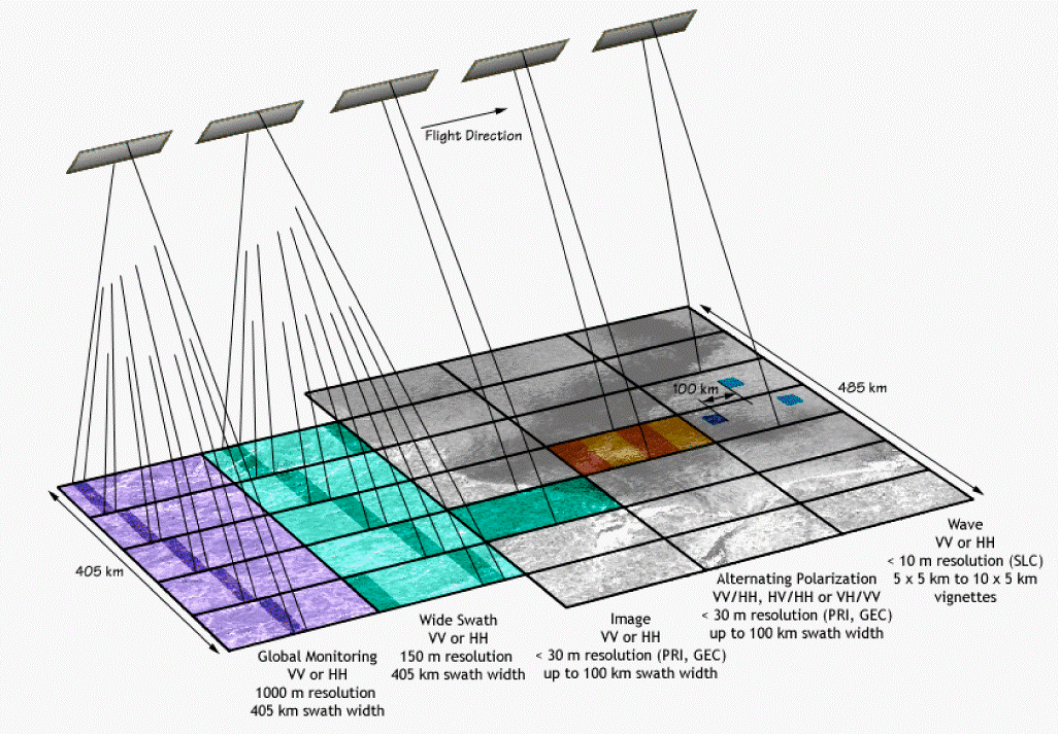

ENVISAT ASAR Operating Modes

Operating Mode	Description
Image (IM)	VV or HH polarization images from any of 7 selectable swaths. Swath width between approximately 56 km (swath 7) and 100 km (swath 1) across-track. Spatial resolution of approximately 30 m (for precision product) similar to the ERS SAR PRI.
Alternating Polarization (AP)	Two co-registered images per acquisition, from any of 7 selectable swaths. HH/VV HH/HV or VV/VH polarization pairs possible. Spatial resolution of approximately 30 m (for precision product).
Wide Swath (WS)	400 km by 400 km wide swath image. Spatial resolution of approximately 150 m by 150 m for nominal product. VV or HH polarization.
Global Monitoring (GM)	Spatial resolution of approximately 1000 m in azimuth by 1000 m in range for nominal product. Up to a full orbit of coverage, HH or VV polarization.
Wave Mode (WV)	A small imagette (dimensions range between 10 km by 5 km, to 5 km by 5 km) is acquired at regular intervals of 100 km along-track. The imagette can be positioned anywhere in an Image Mode swath. Up to two positions in a single swath or in different swaths may be specified, with acquisitions alternating between one and the other (successive imagettes will hence have a separation of 200 km between acquisitions at a given position). HH or VV polarization may be chosen. Imagettes are converted to wave spectra for ocean monitoring.

[Adapted from *http://envisat.esa.int/dataproducts/asar/CNTR2-2.htm#eph.asar.prodalg.orgprod*]

Appendix A

ENVISAT ASAR Products

Mode	Product Name	Nominal Resolution (m)	Pixel Spacing (m)	Approximate Coverage (km)
Image	IM precision	30 x 30	12.5 x 12.5	56-100 x 100
	IM single look	9 slant x 6	natural	56-100 x 100
	IM geocoded	30 x 30	12.5 x 12.5	100 x 100
	IM medium res.	150 x 150	75 x 75	56-100 x 100
	IM browse	900 x 900	225 x 225	56-100 x 100
Alternating Polarization	AP precision	30 x 30	12.5 x 12.5	56-100 x 100
	AP single look	9 slant x 12	natural	56-100 x 100
	AP geocoded	30 x 30	12.5 x 12.5	100 x 100
	AP medium res.	150 x 150	75 x 75	56-100 x 100
	AP browse	900 x 900	225 x 225	56-100 x 100
Wide Swath	WS medium res.	150 x 150	75 x 75	400 x 400
	WS browse	1800x1800	900 x 900	400 x 400
Wave	WV imagette & cross spectra	9 slant x 6	natural	5 x 5 to 10 x 5
	WV cross spectra	-	-	5 x 5 to 10 x 5
Global Monitoring	GM image	1000 x 1000	500 x 500	400 x 400
	GM browse	2000 x 2000	1000 x 1000	400 x 400

[Adapted from *Desnos, Y-L., C. Buck, J. Guijarro, J-L. Suchail and R. Torres, E. Attema, 2000: ASAR – Envisat's Advanced Synthetic Aperture Radar Building on ERS Achievements towards Future Earth Watch Missions. http://esapub.esrin.esa.it/bulletin/bullet102/Desnos102.pdf*]

RADARSAT-1

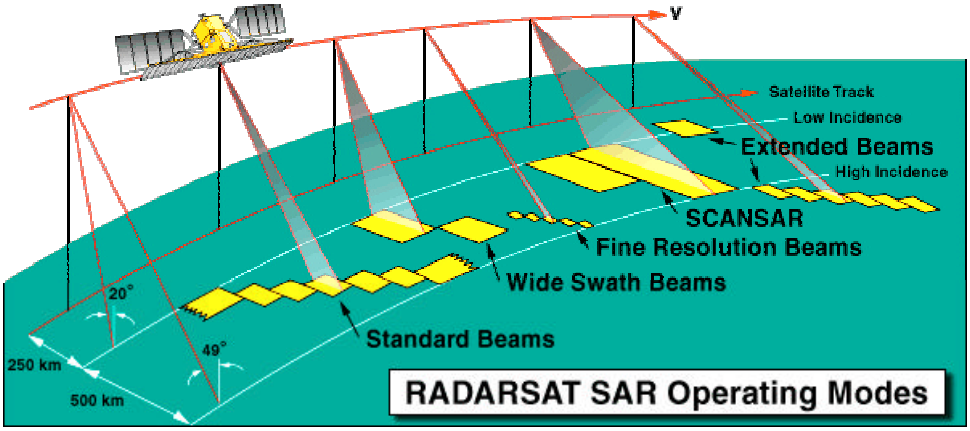

Operating Mode	Nominal Resolution (m)	Nominal Area Coverage (km)
Fine Beam	8	50 x 50
Standard Beam	25	100 x 100
Wide Beam	30	150 x 150
ScanSAR Narrow Beam	50	300 x 300
ScanSAR Wide Beam	100	500 x 500
Extended – High	25	75 x 75
Extended – Low	35	170 x 170

[Adapted from *http://www.rsi.ca/resources/satellites/cl_ra_bm.htm*]

RADARSAT-1 Processing Levels - Canada

Product Name	Description
Signal Data (or RAW data)	Radar signal received by the SAR instrument. Requires SAR processing capabilities to create images.
Single Look Complex (SLC)	Retains the phase and amplitude information of the original SAR data. It has been corrected for satellite reception errors, and includes latitude and longitude positional information. Data is stored in slant range.
Path Image	Processing aligns the scene parallel to the satellite's orbit path with latitude and longitude positional information added.
Path Image Plus	Uses smaller pixel spacing than Path Image to retain full RADARSAT beam mode resolution
Map Image	Orients the scene with "North Up" and corrects the scene to a map projection.
Precision Map Image	Orients the scene with "North Up" and may provide even greater positional accuracy than Map Image processing. Ground Control Points (GCPs) as well as a map projection are used to spatially align the scene.
Ortho-Imag	Removes terrain distortions inherent in satellite imagery. The scene is oriented to a standard map projection, corrected with a digital elevation model (DEM) and GCPs.

[Adapted from *http://www.rsi.ca/resources/satellites/proc_lev.htm*]

Appendix A

RADARSAT-1 Processing – U.S. Alaska Satellite Facility

ASF Radarsat Products	Nominal coverage per frame	Pixel spacing	Resolution
Full Resolution ScanSAR Wide A	500x500km	50m	75m
Full Resolution ScanSAR Wide B	450x450km	50m	75m
Full Resolution Standard beams 1-7	100x100km	12.5m	25m
Full Resolution Fine beam 1	50x50km	6.25m	10m
Medium Resolution ScanSAR Wide A	500x500km	100m	150m
Medium Resolution ScanSAR Wide B	450x450km	100m	150m
Low Resolution ScanSAR Wide A	500x500km	400m	600m
Low Resolution ScanSAR Wide B	450x450km	400m	600m
Low Resolution Standard beams 1-7	100x100km	100m	240m
Low Resolution Fine beam 1	50x50km	12.5m	20m

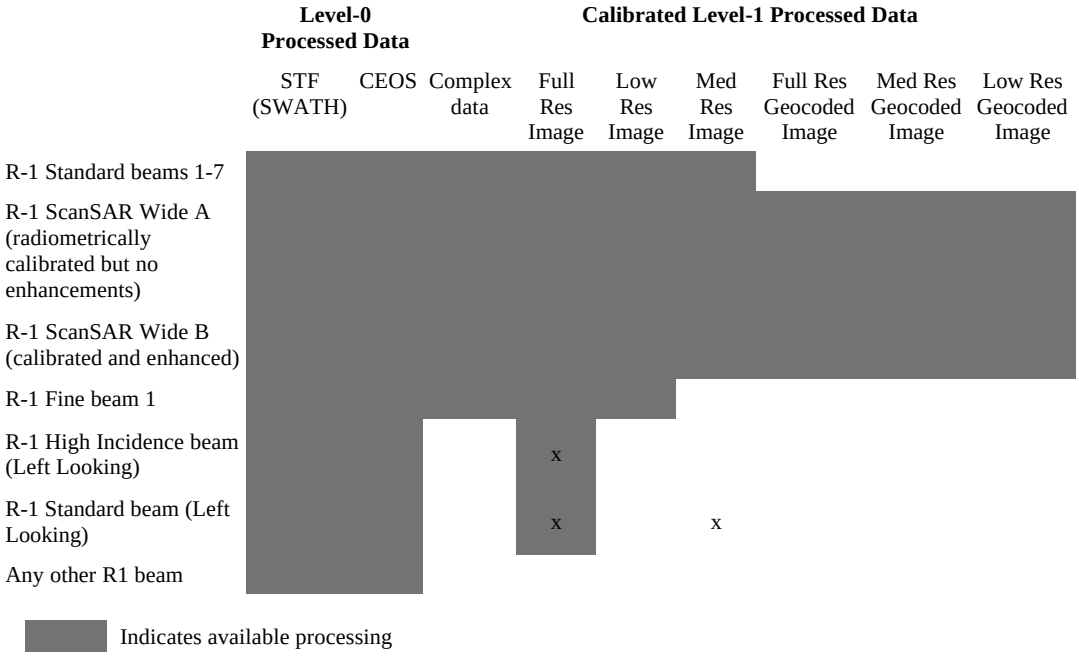

Shuttle Imaging Radar – C (SIR-C)

The SIR-C flew aboard the Space Shuttle with two flights from 9 to 20 April 1994 and 30 September to 11 October 1994. Approximately 145 hours of SAR data were collected corresponding to an area of 149 million km^2 of the Earth's surface. SIR-C was a two-frequency radar including L-band (23 cm wavelength) and C-band (6 cm wavelength) with four polarizations (HH, HV, VH, VV). The ground swath width varied from 15 to 90 kilometers depending on the imaging mode and incidence angles of the radar beams.
[For more information see: http://edcdaac.usgs.gov/sir-c/sir-c.html]

SIR-C Coverage Map

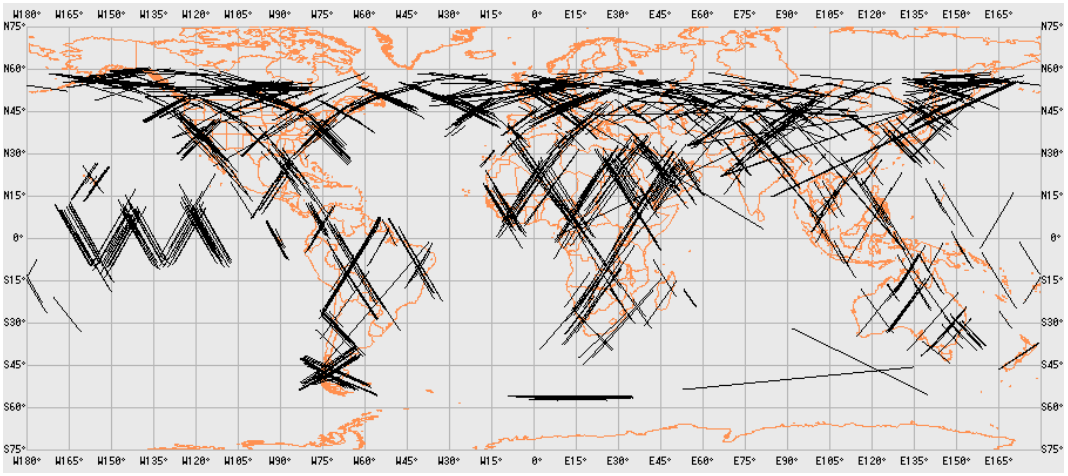

SIR-C SAR Image Products

Product Name	Description
Survey Product	• Description: Single frequency (L- or C-band) / single channel 4-look amplitude image • Projection: Ground-range. • Coverage: Swath width x 100 km. • Ground Resolution: Approximately 100 m in range and azimuth. • Pixel size: 50 m in range and azimuth.
Single-look Precision Product	• Description: Single Frequency (L- or C-band) / Multi-channel image data • Coverage: Swath width x 50 km. • Projection: Slant-range. • Resolution: Approximately 7.5 m in range and azimuth.
Multi-look Precision Product	• Description: Single Frequency (L- or C-band) / Multi-channel data. • Coverage: Swath width x 100 km. • Projection: Ground-range. • Ground Resolution: 25 m in range and azimuth with 12.5 m pixel spacing.

http://edcdaac.usgs.gov/sir-c/products.html

Appendix B

On-Line SAR Image Archives

Alaska Satellite Facility (ASF)
This site provides access by authorized users to ERS-1/2 and RADARSAT-1 SAR data received by the ASF ground station as well as other data from other areas obtained in support of U.S. researchers.

http://www.asf.alaska.edu

CCRS Earth Observing Catalogue (CEOCat)
This site provides browse access to RADARSAT-1, ERS-1/2, and SEASAT SAR (Canadian coverage only) data.
For guest browsing use: username = earth password = ceocat_eo

http://ceocat.ccrs.nrcan.gc.ca

CCRS RADARSAT-1 Quicklook Swath Browser
This site provides views of the location of RADARSAT-1 acquisitions.

http://quicklook.ccrs.nrcan.gc.ca/

Comprehensive Large Array data Stewardship System (CLASS)
Formerly known as the Satellite Active Archive (SAA), CLASS includes (among other satellite data) ERS-1/2 and RADARSAT-1 imagery received by the National Ice Center and NOAA/NESDIS. Data are predominantly from the ASF but also includes limited data from other ground stations. Access to SAR data is restricted to authorized users.

http://www.saa.noaa.gov

DLR (Deutschen Zentrum für Luft- und Raumfahrt) SIR-C/XSAR Project
This site provides information about SIRC/X-SAR X-band mission with a browse tool for the entire X-SAR data collection.

http://www.op.dlr.de/ne-hf/SRL.html

ESA Earthnet Online Interactive (EOLI) Catalogue
This site provides access to ERS-1/2 and JERS-1 SAR data through the ESA Open Distributed Information & Services for Earth Observation (ODISSEO) server.

http://odisseo.esrin.esa.it/eoli/

For non-java browsers use: http://odisseo.esrin.esa.it/eoli/eolinojava.html

ESA EOLI ENVISAT Catalogue
This site allows the user to browse the meta data and quick-look images of the available ENVISAT ASAR data.

http://muis-env.esrin.esa.it/

USGS Land Processes Distributed Active Archive Center (LP DAAC) SIR-C Precision and Survey Data Interface
This site provides a browsing and ordering tool for Precision (25 m resolution) and Survey (100 m resolution) SIR-C C-band and L-band data.
http://edcdaac.usgs.gov/sir-c/

Other SAR Resources

ESA Earthnet Online DESCW Off-line Catalogue
The DESCW (Display Earth remote sensing Swath Coverage for Windows) is an offline multi-mission software tool created to display the coverage and ESA inventory of data products from Earth Observation satellites (ENVISAT, ERS, etc.).
http://earth.esa.int/descw/

NASA/JPL Imaging Radar Home Page
This site provides information in imaging radar as well as links to several NASA SAR related reports including:

- Seasat Views Ocean and Sea Ice with Synthetic Aperture Radar, 1982, JPL Pub. 81-120

CSA RADARSAT-1 Home Page
http://www.space.gc.ca/asc/eng/csa_sectors/earth/radarsat1/radarsat1.asp

CSA RADARSAT-2 Home Page
http://www.space.gc.ca/asc/eng/csa_sectors/earth/radarsat2/radarsat2.asp

ENVISAT ASAR Home Page
http://envisat.esa.int/instruments/asar/

ENVISAT ASAR User Guide
http://envisat.esa.int/dataproducts/asar/

ERS-1/2 SAR Home Page
http://earth.esa.int/ers/eeo4.128/

ERS-1/2 SAR Online Documentation
http://earth.esa.int/services/esa_doc/doc_sar.html

JAXA ALOS Home Page
http://alos.jaxa.jp/main2e.html

RADARSAT International (RSI) RADARSAT-1 Home Page
http://www.rsi.ca/products/sensor/radarsat/radarsat1.asp

RADARSAT-1 User Guide
http://www.rsi.ca/products/sensor/radarsat/rsiug98_499.pdf

Table 1 - Definition of SAR Radar Frequency Bands [*Evans*, 1995]

Radar Band Designation	Frequency Range (GHz)	Wavelength Range (cm)
P	0.230 -1	130 – 30
L	1-2	30 – 15
S	2-4	15 - 7.5
C	4-8	7.5 - 3.75
X	8-12.5	3.75 - 2.40
Ku	12.5-18	2.40 - 1.67
K	18 -26.5	1.67 - 1.13
Ka	26.5- 40	1.13 - 0.75

- Evans, D. L., Ed, 1995, *Spaceborne Synthetic Aperture Radar: Current Status and Future Directions, A Report to the Committee on Earth Sciences Space Studies Board, National Research Council,* NASA Tech. Memo. 4679.

Appendix D
Author Contact Information

Werner Alpers
University of Hamburg
Center for Marine and Climate Research
Institute of Oceanography
Bundesstr. 53
D-20146 Hamburg Germany
Phone: 49 (0)-40-42838-5432
E-Mail: alpers@ifm.uni-hamburg.de

Henrik Steen Andersen
Danish Meteorological Institute
Ice Charting and Remote Sensing Division
Lyngbyvej 100
Copenhagen DK-2100, Denmark
Phone: +45 39 15 73 40
hsa@dmi.dk

Pablo Clemente-Colón
NOAA/NESDIS/ORA/STAR
WWBG, E/RA3, Room 102
5200 Auth Road
Camp Springs, MD 20746-4304
Phone: 301-763-8231 X168
Pablo.Clemente-Colon@noaa.gov
Oceansar@hotmail.com

Craig J. Evanego
National Ice Center
NOAA/NESDIS/OSDPD
E/SP, FB#4, Room 2301
4251 Suitland Road
Washington, DC. 20395
Phone: 301-394-3029
evanegoc@natice.noaa.gov

Karen S. Friedman
NOAA/NESDIS/ORA/STAR
WWBG, E/RA3, Room 102
5200 Auth Road
Camp Springs, MD 20746-4304
Phone: 301-763-8349
karen.friedman@noaa.gov
karenf@alum.mit.edu

Keld Q. Hansen
Danish Meteorological Institute
Ice Charting and Remote Sensing Division
Lyngbyvej 100
DK – 2100 Copenhagen O, Denmark
Phone: +45 39 15 73 44
kqh@dmi.dk

Benjamin Holt
Oceanography Element
Jet Propulsion Laboratory
Mail Stop 300-323
4800 Oak Grove Drive
Pasadena CA 91109
ben@pacific.jpl.nasa.gov

Christopher Jackson
Global Ocean Assocaites
6220 Jean Louise Way
Alexandria, VA 22310
Phone: 703-822-9760
goa@sarusersmanual.com

Johnny Johannessen
Nansen Environmental and Remote Sensing Center
Edvard Griegsvei 3a
Bergen, N 5059 Norway
Phone: (+47) 55 29 7288
Johnny.Johannessen@nrsc.no

Xiaofeng Li
NOAA/NESDIS/ORA/STAR
WWBG, E/RA3, Room 102
5200 Auth Road
Camp Springs, MD 20746-4304
Phone: 301-763-8177
Xiaofeng.Li@noaa.gov

David R. Lyzenga
Naval Architecture and Marine Engineering Dept.
University of Michigan
Ann Arbor, MI 48109-2145
Phone: 734-764-3216
Lyzenga@umich.edu

Michael Manore
Canadian Ice Service
Meteorological Service of Canada
Environment Canada
373 Sussex Dr., E-3
Ottawa, Ontario, Canada K1A 0H3
Phone: +1-613-996-5088
mike.manore@ec.gc.ca

Appendix D

George Marmorino
Remote Sensing Division (Code 7230)
Naval Research Laboratory,
Washington DC 20375-5351
Marmorino@nrl.navy.mil

William G. Pichel
NOAA/NESDIS/ORA/STAR
WWBG, E/RA3, Room 102
5200 Auth Road
Camp Springs, MD 20746-4304
Phone: 301-763-8231 X166
William.G.Pichel@noaa.gov

Christian Melsheimer
Institute of Environmental Physics
University of Bremen
Otto-Hahn-Allee 1 (NW1, room N3270)
D-28359 Bremen, Germany
Phone: +49-(0)421-218-2584
e-mail: melsheimer@uni-bremen.de

Todd D. Sikora
Department of Oceanography
United States Naval Academy
Annapolis, MD 21402
Phone: 410-293-6561
sikora@usna.edu

Samuel W. (Walt) McCandless, Jr.
User Systems Enterprises, Inc.
P.O. Box 201750
Denver, Colorado – 89220
Phone: 303-394-3902
waltmc@usersystems.com

Robert Shuchman
Altarum Institute
3520 Green Court
Suite 300
Ann Arbor, MI 48105
Phone: 734-302-5608
robert.shuchman@altarum.org

Frank Monaldo
The Johns Hopkins University
Applied Physics Laboratory
11100 Johns Hopkins Road
Laurel, MD 20723-6099
Phone:240-228-8648
Frank.Monaldo@jhuapl.edu

Donald R. Thompson
Johns Hopkins University
Applied Physics Laboratory
11100 Johns Hopkins Road
Laurel, MD 20723-6099
Phone: 240-228-4559
donald.r.thompson@jhuapl.edu

Christopher O'Connors
Argos DCS Special Projects
NOAA/NESDIS/OSDPD
Direct Services Division
E/SP3, FB#4, RM 3320
5200 Auth Road
Suitland, MD 20746
Phone: 301-457-5681 Ext. 125
Christopher.O'Connors@noaa.gov

Paris W. Vachon
Canada Centre for Remote Sensing, Natural Resources Canada
On secondment to
Defence R&D Canada - Ottawa
3701 Carling Avenue, Ottawa, Ont. K1A 0Z4
Phone: 613-991-2584
Paris.Vachon@drdc-rddc.gc.ca

Robert G. Onstott
General Dynamics / Advanced Information Systems
Post Office Box 134008
Ann Arbor, Michigan 48113-4008
Phone: 734-994-1200 ext 2544
robert.onstott@GD-AIS.com

Christopher Wackerman
General Dynamics / Advanced Information Systems
P.O. Box 134008
Ann Arbor MI 48113-4008
Phone: 734-994-1200 ext 2509
Chris.wackerman@gd-ais.com